

Following are the steps changing the Wireless password and/or Network Name:

*Note: For best results, if possible connect the device directly to the router via Ethernet cable.

Step 1: Access the modem

Open a browser, and navigate to 192.168.1.1



A prompt for username and password will appear.
By default, username is 'admin' and password is 'admin'



Step 2: Access Wireless Settings

Once logged in, click on 'Wireless' on the left menu
Choose 'Security' from the sub-menu that appears.



To view/change the current wireless password

Use "Click here to display" to show the current wireless passphrase.
(NOTE: If you have popup blocker enabled, allow the popup window)




A pop-up window opens showing the current password.



Note this for your records as this is what you will be using to connect wirelessly on all devices.

Step 3: Save Settings

If any changes were made, Hit 'Save/Apply' and the router will broadcast the new information.
If no changes were made, skip this step and continue to connect wirelessly.

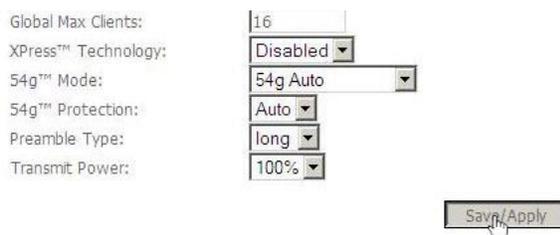

Optional: Change the "Network Name" or SSID

To change the current "Network Name" also known as the 'SSID'
Choose 'Wireless' on the left menu.
Click on 'Basic' to load basic wireless settings if not already loaded.



The screenshot shows a web interface for configuring wireless settings. On the left is a navigation menu with the following items: Device Info, Advanced Setup, Wireless, Basic (highlighted in red), Security, MAC Filter, Wireless Bridge, Advanced, and Station Info. The main content area is titled "Wireless -- Basic" and contains the following elements:

- A descriptive paragraph: "This page allows you to configure basic features of the wireless LAN interface. You active scans, set the wireless network name (also known as SSID) and restrict the Click "Apply" to configure the basic wireless options."
- Three checkboxes:
 - Enable Wireless
 - Hide Access Point
 - Clients Isolation
- SSID: A text input field containing "Network Name" with a green highlight.
- BSSID: 80:A1:D7
- Country: A dropdown menu showing "CANADA".
- Max Clients: A text input field containing "16".
- A "Save/Apply" button at the bottom.

In the text box labelled 'SSID', erase the current name and enter a new one.
Click 'Save/Apply' to make changes and re-connect using the new network name.

To connect/re-connect to the WiFi network:

Your device's operating system will vary on how specifically to scan for wireless networks.
To begin, scan for wireless networks, Your wireless network should be listed as an option, upon choosing the network your device may ask you for a password. Enter the password/key for the wireless router and connect.